

## T.Stream<sup>RM</sup>™



**3G Real-time  
Multi-use**  
continuously monitors  
all relevant data and  
send it to the cloud.

from **-30°C** to **+70°C**

**PHARMACEUTICALS**



**FRESH**



**COLD CHAIN LOGISTICS**



**CUT FLOWERS**



halveon

T.Stream<sup>RM</sup>™



**BATTERY**

● OK ● LOW

**SHIPMENT**

● OK ● ALARM

**RECORDING**

● SIGNAL ● NO SIGNAL  
OK SIGNAL



START  
STATUS




STOP

### PLUS & FEATURES

- New generation of real-time temperature logger
- Support 3G network, global coverage
- Keeping all the usage habits of USB data logger USB Logger + Real-time Cloud Function
- Full cold chain visibility (location, temperature, light, route) via cloud improve transportation efficiency and reduce products loss with real-time monitoring
- 24/7 data control & analysis, manage quality and control of your products in-transit.
- Real time alert via SMS, Email and APP

REAL DIMENSIONS

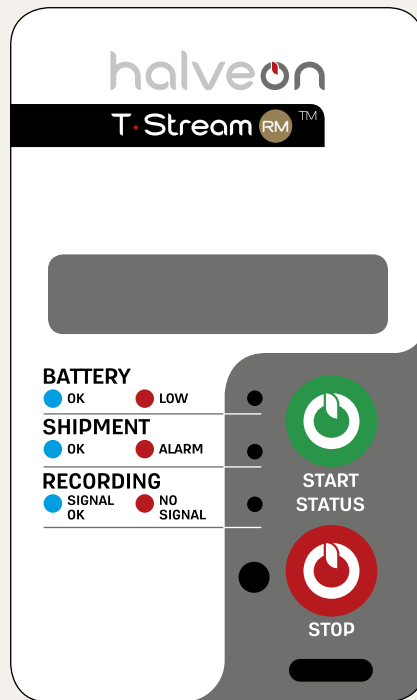

## TECHNICAL SPECIFICATIONS

USAGE TYPE	Multi-use (1 Year)
SENSOR	- Internal Digital Temperature Sensor (NIST traceable) - light sensor
MEMORY CAPACITY	28800 readings
MEASUREMENT RANGE	-30°C • 70°C (-22°F • 158°F)
ACCURACY	+/-0.5°C / 0.9°F (-10°C • 45°C), +/-1°C (Other)
RESOLUTION	0,1°C
LOCATION TYPE	LBS base station positioning
CELLULAR COMMUNICATIONS	- 2G: GSM (850, 900, 1800, 1900 MHz) - 3G: Band 1/2/4/5/8 Global Coverage
SIM CARD	Internal Embedded (Global data Roaming)
IN USE LIFE	10/20/30/60 days (based on monitoring and reporting intervals)
SHEL LIFE	1 year
DATA INTERVAL	(settable via platform) - logging - 10 Min. - reporting - 20 Min. (20/30/60/120)
BATTERY LIFE	One charge, Max 60 days
CONNECTION	USB 2.0. Get PDF report via USB
PROTECTION CLASS	IP65